



Emergency LED Driver
Class 2 Output 15-54 Vdc
7 Watts Output Power
4 Hour Extended Run-time

Project: _____
Location: _____
Cat.No: _____
Type: _____
Lamps: _____ Qty: _____
Notes: _____

Specifications

UL Listed for US and Canada

Listed to UL924 and tested to CSA 22.2, No. 141
For Field or Factory Installation
(Indoor and Damp)
Class 2 - UL 1310 Certified, CSA 22.2 No. 223-
M91 compliant

Illumination Time

240 Minutes

Full Warranty

5 Years (NOT pro-rata)

Universal Input Voltage

120-277 VAC, 50/60 Hz

Output Voltage

15-54 VDC

Output Power

7 W

Test Switch/Charging Indicator Light

IP65 rated for ingress protection to dust and
water jets.
Test Switch Assembly is UL2043 Plenum-Rated.

Battery

High-Temperature, Maintenance-Free
LFP Battery Technology

Recharge Time

24 Hours

Temperature Rating

Ambient: 0°C to +55°C (32°F to 131°F)
Case: Tc (Max): 65°C

Dimensions

B2 Enclosure: 15.34" x 2.25" x 1.18" (369 mm x 58
mm x 30 mm)
Mounting Center: 15.0" (356 mm)

Maximum Weight

2.67 lbs

Initial Illumination Levels

See guide on Page 2

Product order number:
BSL07B2UAK55L14HI1

12 NC number:
913702489101

Benefits

- UL Listed for field or factory installation.
- When paired with a compatible LED luminaire, provides NFPA 101 compliant emergency lighting.
- Extended 4 hour emergency run-time meets special occupancy requirements determined by local codes.
- Intelligent output initially provides rated power regardless of the LED array voltage.
- Safe, low voltage Class 2 output.
- Meets CEC Title 20 (California Energy Commission) efficiency standards.
- Smart Charger Technology with low energy consumption helps meet Title 24 building requirements.
- Automatically performs code required testing (Self-Test).
- Allows for luminaire to be completely installed prior to AC mains availability (ABCConnect).
- Easily disabled for storage and fool proof commissioning (ABCConnect).
- Universal Input reduces ordering and stocking complexity and reduces field wiring errors.
- Compatible with a wide variety of LED arrays and AC drivers.
- Test switch is IP65 rated for protection to dust and water ingress.
- No conduit is needed for plenum rated test switch assembly.

BSL07B2

Class 2, 4 Hour Run-time Emergency LED Driver

Application

This Bodine emergency LED driver is UL Listed for field or factory installations in the US and Canada and allows the same LED luminaire to be used for normal and emergency operation. These emergency LED drivers work in conjunction with an AC LED driver that has an output current not to exceed five (5) amps. This product consists of a battery and electronic circuitry in one compact galvanized steel case. This product can be used with an LED lighting load up to 54 Vdc, delivering an initial minimum power of 7 watts for 240 minutes. This extended 4 hour emergency run-time meets special occupancy requirements determined by local codes, including nursing homes, elevators, high rise buildings and others. If used in an emergency-only fixture, no AC driver is necessary. This product is suitable for damp locations and for sealed and gasketed fixtures. This product is not suitable for air handling heated air outlets or wet or hazardous locations. For more information about specific LED and AC driver compatibility, please call Bodine Tech Support at 1-888-BODINE-8.

Operation

When AC power fails, the Bodine emergency driver immediately switches to the emergency mode, operating the LED load for a minimum of 240 minutes. When AC power is restored, the emergency driver automatically returns to the charging mode. While charging, the product will perform the required 30-second test once a month and a 240-minute test once per year. During this test, the product will monitor its operation, and alert building occupants to a possible issue through flashing of the charge indicator LED. The product shall be provided with self-test and ABCConnect functionality.

ABCConnect

ABCConnect (Automatic Bodine Connect) simplifies shipping, storage, installation, and commissioning of the emergency lighting luminaire. It allows for the luminaire to be installed and made ready for use without needing to reopen the luminaire when AC

power is available, also avoiding unnecessary drain on the battery. Once activated, the product can also be manually disabled, allowing the product or the luminaire to be safely stored for extended periods of time. In the situation where the user manually deactivates the emergency operation for shipping or storing product via the test switch, the Automatic Bodine Connect feature reactivates power when the driver senses that AC current is applied. This feature saves time, labor and the potential to overlook the converter connector step. This reduces the possibility of inadvertently discharging the battery prior to installation, whether in transit or storage.

Self-Test

This emergency driver includes self-test functionality. The self testing feature automatically performs the required 30-second test once every month and the required 240-minute, full discharge, once per year. The product monitors the performance of the battery, the charging system, the LED load, and the temperature of the installation. Test results are reported to maintenance personnel via flashing of the charge indicator light. A solidly lit charging indicator light (no flashing) means that the unit detected no issues during the self-test routine. If the unit has encountered a problem after installation and during the self-test, then it will flash an error code using the indicator light. The number of flashes indicates an issue with specific functionality of the unit. Full details on the error codes are found in the unit installation instructions. The user can also manually initiate a 30-second self-test at any time by simply pressing and holding the test switch for 5 seconds. At the conclusion of the self-test, the unit will return to the normal mode and indicate any errors, if detected.

Installation

This product does not affect normal fixture operation and may be used with either a switched or unswitched fixture. If a switched fixture is used, an unswitched hot lead must be connected to the emergency driver. The emergency driver must be fed from the same branch circuit as

the AC driver. Installation is not recommended with fixtures where the ambient temperature may fall below 0°C. This product is suitable for installation in sealed and gasketed fixtures.

Emergency Illumination

This product operates an LED load, delivering an initial minimum 7 watts of power for a minimum of 240 minutes.

Specification

Emergency lighting shall be provided by using a standard LED fixture equipped with a Bodine BSL07B2 emergency LED driver. This emergency driver shall consist of a high temperature, maintenance free LFP and electronic circuitry, contained in a metal chassis. Installation hardware, an IP65 test switch, and a plenum rated test switch cable assembly shall also be provided. The emergency driver shall be capable of operating an LED load for a minimum of 240 minutes and of delivering an initial minimum output power of 7 watts, following a battery charging period of at least 24 hours. It is suitable for damp locations and sealed and gasketed fixtures. The unit contains a smart charger system that initially charges the battery within the rated time then reduces power consumption to a lower standby power mode. The unit shall automatically perform the code required monthly and annual testing (self-testing) and employ technology to automatically enable charging, sensing, and emergency operation of the inverter by means of detecting when AC power is first applied (ABCConnect). The unit shall comply with emergency standards set forth by the current NEC, Part 15 of the FCC Rules, and also meets CEC Title 20 (California Energy Commission) efficiency standards. The emergency driver shall be UL Listed for field or factory installation and shall be suitable for temperature environments ranging from 0°C to +55°C.

Warranty

The products covered by this specification are warranted for five (5) full years from date of manufacture. Please see detailed warranty information on our web site.

Lumen Output Guide

These products are suitable for installation with a wide variety of LED light engines. To estimate the egress lighting illumination levels achieved by a system incorporating these products, follow the steps below.

1. Find the efficacy of the LED load which will be given as lumens/watt (lm/w). This data can be found by direct measurement, accessing of 3rd party test data, or from the luminaire supplier directly. Typically, the efficacy data found will be on the whole system, which includes losses due to driver efficiency and LED array temperatures. Actual lumens achieved may be higher. However, using these numbers in the following calculations will provide worst-case lumen estimations.
2. Determine the initial lumens delivered in the emergency mode by multiplying the LED load efficacy by the amount of power delivered by the emergency driver when running in the emergency mode.

$$\text{LUMENS IN THE EMERGENCY MODE} = \text{LUMENS PER WATT OF FIXTURE} \times \text{OUTPUT POWER OF EMERGENCY LED DRIVER}$$

3. Using this result and industry standard lighting design tools, the estimated path of egress illumination levels can be calculated.

| Example Efficacy (lumens per watt) | BSL07B2 Lumen Output |
|------------------------------------|----------------------|
| 110 | 770 |
| 130 | 910 |
| 150 | 1,050 |
| 170 | 1,190 |

BSL07B2 Class 2, 4 Hour Run-time Emergency LED Driver

Lithium Battery Shipping Regulations

To comply with IATA provisions for air transporting lithium batteries, and for a step by step guidance through the shipping process, please visit <http://www.iata.org/publications/store/Pages/lithium-battery-shipping-guidelines.aspx>


To view a Classification Flowchart for package marking requirements, please visit <http://www.iata.org/whatwedo/cargo/dgr/Pages/lithium-batteries.aspx>. Scroll to the "Guidance Material" section and click on the provided "Guidance Document" PDF link. The Classification Flowchart will be found on page 5. The BSL07B2 battery cell capacity is less than 20Wh, and the battery pack capacity is less than 100 Wh.

Drawings


B2 Enclosure Dimensions

15.34" x 2.25" x 1.18"

Mounting center - 15.0"

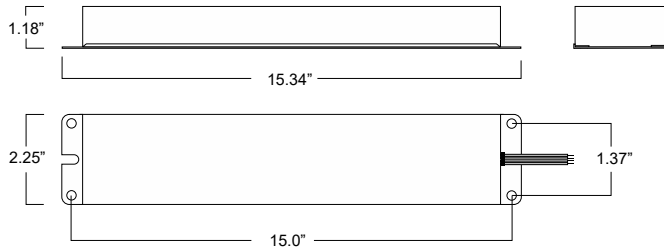

Plenum-Rated Test Switch Assembly

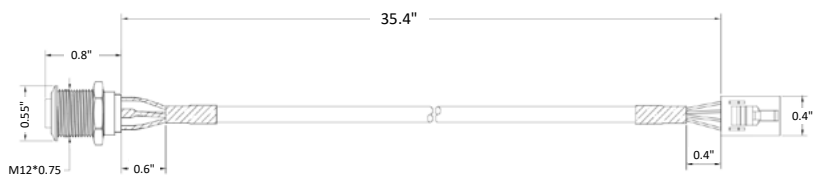

Note: Required hole is 0.5 inches (12.5mm).

Ordering Guide

example: BSL07B2UAK55L14H1

| Product Category | Watts | Case | Input Voltage | Output Voltage | Temperature | | Type/Harness | Special Features | Packaging | Generation |
|---------------------------------|-----------|---------------------------------------|---------------|----------------|------------------|--------------------|----------------------------------|-------------------|--------------|------------|
| BSL | 07 | B2 | U | A | K | 55 | L1 | 4H | I | 1 |
| BSL Bodine Solid State Lighting | 07 | B2 (see Drawings for case dimensions) | U 120-277 Vac | A 15-54 Vdc | K Min. Temp. 0°C | 55 Max. Temp. 55°C | L1 No conduit, leads out one end | 4H 4 hour runtime | I Individual | 1 |



© 2021 Signify Holding. All rights reserved. The information provided herein is subject to change, without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify.

Signify North America Corporation
200 Franklin Square Drive,
Somerset, NJ 08873
Telephone 855-486-2216

Signify Canada Ltd.
281 Hillmount Road,
Markham, ON, Canada L6C 2S3
Telephone 800-668-9008

All trademarks are owned by Signify Holding or their respective owners.