



Long-lasting and low maintenance, LED-based light sources are an excellent solution for all lighting applications. For optimal performance, these solutions require reliable drivers matching the long lifetime of the LEDs. **The Advance Xitanium LED Outdoor Driver portfolio** offers a range of products specially designed to operate LED solutions in outdoor applications. These drivers are designed for hard-wired integration into outdoor luminaires even in rugged applications. They operate to specification under wide temperature and electrical ranges to help ensure reliability.

Specifications


| Input Voltage (Vac) | Output Power (W) | Output Voltage Range (V) | Output Current (A) | Efficiency@ Max Load and 70°C Case | Max Case Temp. (°C) | Input Current (Arms) | Max. Input Power (W) | THD @ Max Load (%) | Power Factor @ Max Load | Surge Protection (Com-bi-Wave, KV) | Envir. Protection Rating | Driver Type |
|---------------------|------------------|--------------------------|--------------------|------------------------------------|---------------------|----------------------|----------------------|--------------------|-------------------------|------------------------------------|---------------------------|------------------|
| 120 | 40W per channel | 27 - 54 Class 2 Output | 0.7 | 87.5 | 80°C | 0.77 | 91 | <10% | >0.95 | 4 | UL damp & dry and Type HL | Constant Current |
| 277 | | | | 89.5 | | 0.33 | | <15% | | | | |

Enclosure

| | In. (mm) |
|-----------------|--------------|
| Case Length | 5.7 (144.7) |
| Case Width | 3.6 (91.4) |
| Case Height | 1.5 (38.2) |
| Mounting Length | 6 (151.5) |
| Overall Length | 6.32 (160.5) |



Wiring Diagram

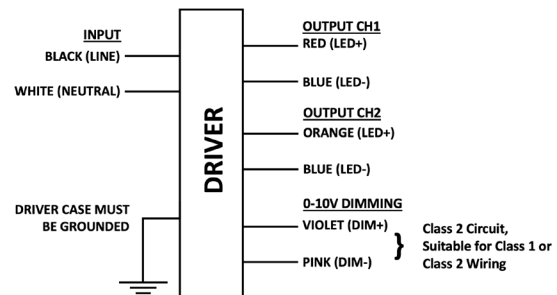

Input and output use lead- wires.

Lead-wires are 18AWG 105C/600V solid copper per UL1452.

Input Lead Length outside enclosure: 10.5" (+2"/-1").

Dimming and Output lead length outside enclosure: 12" (+2"/-1").

Driver case must be grounded.

Warning

- Install in accordance with national and local electrical codes.
- The field-wiring leads or push-in terminals shall be enclosed.

| Dimming | Dimming Range | Minimum Output Current (A) | Other Comments |
|-----------------------------|---------------|----------------------------|-------------------------------------|
| 0-10V Analog Class 2 Wiring | 10% ~ 100% | 0.07 | Dimming source current: 150µA (±3%) |

Xitanium XI080C070V054CNH1

80W 120-277V 0.7A 0-10V

Features

- Dual channel UL Class 2 output
- 50,000+ hour lifetime¹
- Isolated 0-10V dimming

Benefits

- Allows for Class 2 luminaire designs
- Enables long life luminaire designs
- Helps maximize energy savings and allows application-specific light levels

Application

- Roadway
- Parking garages
- Wallpacks

Electrical Specifications

All the specifications are typical and at 25°C Tcase unless specified otherwise.

Product Data

| Order Information | |
|---|---|
| Full Product Code | XI080C070V054CNH1M (Mid-Pack, 10pcs/Box) |
| Line Frequency | 50/60Hz |
| Min. Mains Voltage Operational | 108Vac |
| Max. Mains Voltage Operational | 305Vac |
| Output Information | |
| Maximum Open Circuit Voltage | <60Vdc |
| Output Current Ripple (ripple = peak to average / average) | 15% max @ max Iout Low frequency (≤ 120 Hz) content <5% |
| Output Current Tolerance (at maximum output current) | <5% |
| Protections | Short Circuit, Open Circuit Protection for LED + and LED - and Temperature Foldback |
| Features | |
| 0-10V Dimming | 150 μ A source current from driver. See dim curve for detail. |
| Environment & Approbation | |
| Operating Ambient Temp. Range | -40°C to +55°C |
| Max Case Temperature (Tcase) | 80°C |
| Agency Approbations | UL8750, UL1310, UL935, cUL |
| Electromagnetic Compliance | FCC Title 47 Part 15 Class A |
| Audible Noise | <24dB Class A |
| Weight | 2.1 Lbs/0.95 kgs |

1. Advance Xitanium LED Drivers are manufactured to engineering standards correlating to a designed and average life expectancy of 50,000 hours of operation at maximum rated case temperature. Minimum 90% survivals based on MTBF modeling.

Xitanium XI080C070V054CNH1

80W 120-277V 0.7A 0-10V

Electrical Specifications

All the specifications are typical and at 25°C Tcase unless specified otherwise.

0-10V Dimming Curve

Dimming source current from the driver: 150µA (@ 0<Vdim<8V)


Minimum Dim Level: 10% of Iout (minimum 7mA)

Maximum output voltage on the dimming wires: 12V

The dimming lead leakage current is 0.01mA. The maximum number of drivers that can be connected in parallel to one dimming control circuit is based on this dimming lead leakage current and the calculation is described in the corresponding Design-in Guide.

Approved Dimmer List

| Manufacturer | Manufacturer Part Number |
|--------------|--|
| Lutron | Visit www.lutron.com/advance for a list of dimmers (Mark VII) that will work with this driver. |
| Leviton | IllumaTech IP7 series |
| Advance | Sunrise - SR1200ZTUNV |

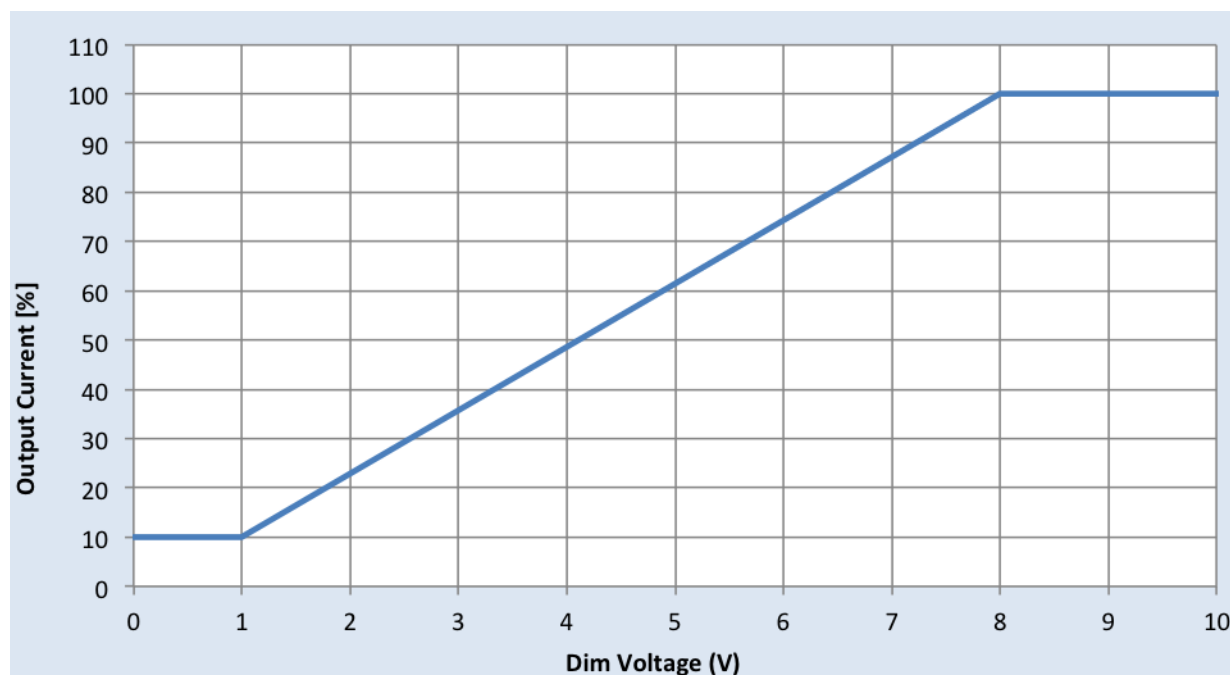


Xitanium XI080C070V054CNH1

80W 120-277V 0.7A 0-10V

Electrical Specifications


All the specifications are typical and at 25°C Tcase unless specified otherwise.

Output Current Vs. Driver Case Temperature

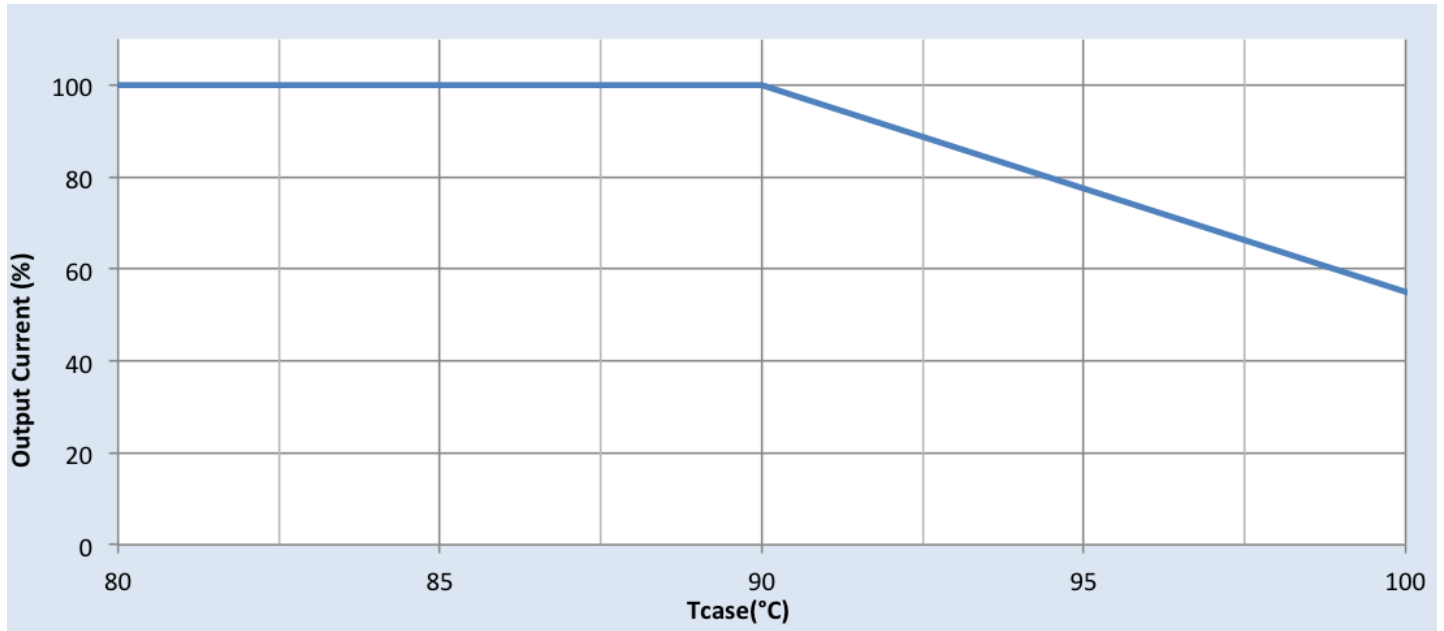

Note: There is $\pm 5^\circ\text{C}$ tolerance on the driver case temperature.

Driver Lifetime Vs. Driver Case Temperature

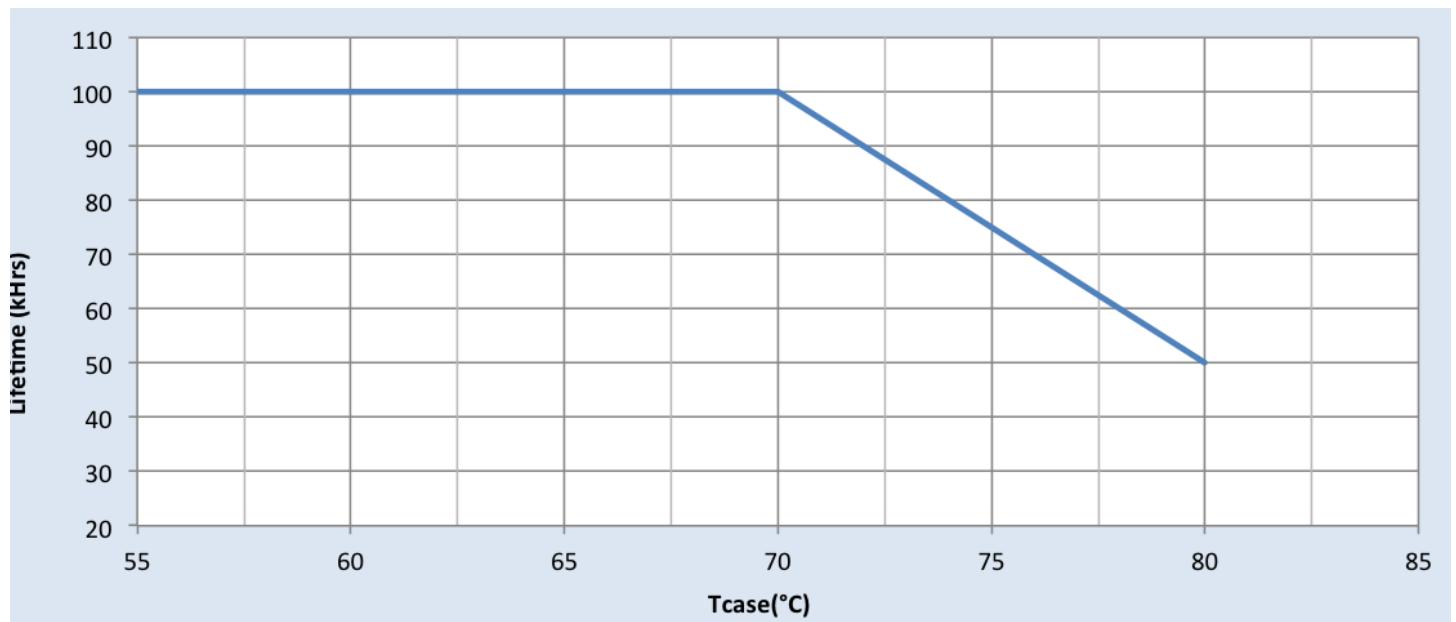


Xitanium XI080C070V054CNH1

80W 120-277V 0.7A 0-10V

Performance Characteristics

Based on measurements on a typical sample. The accuracy of the measurements is within the tolerance of the measurement instruments. The graphs are meant to be a guideline and not a specification.

Efficiency Vs. Output Voltage

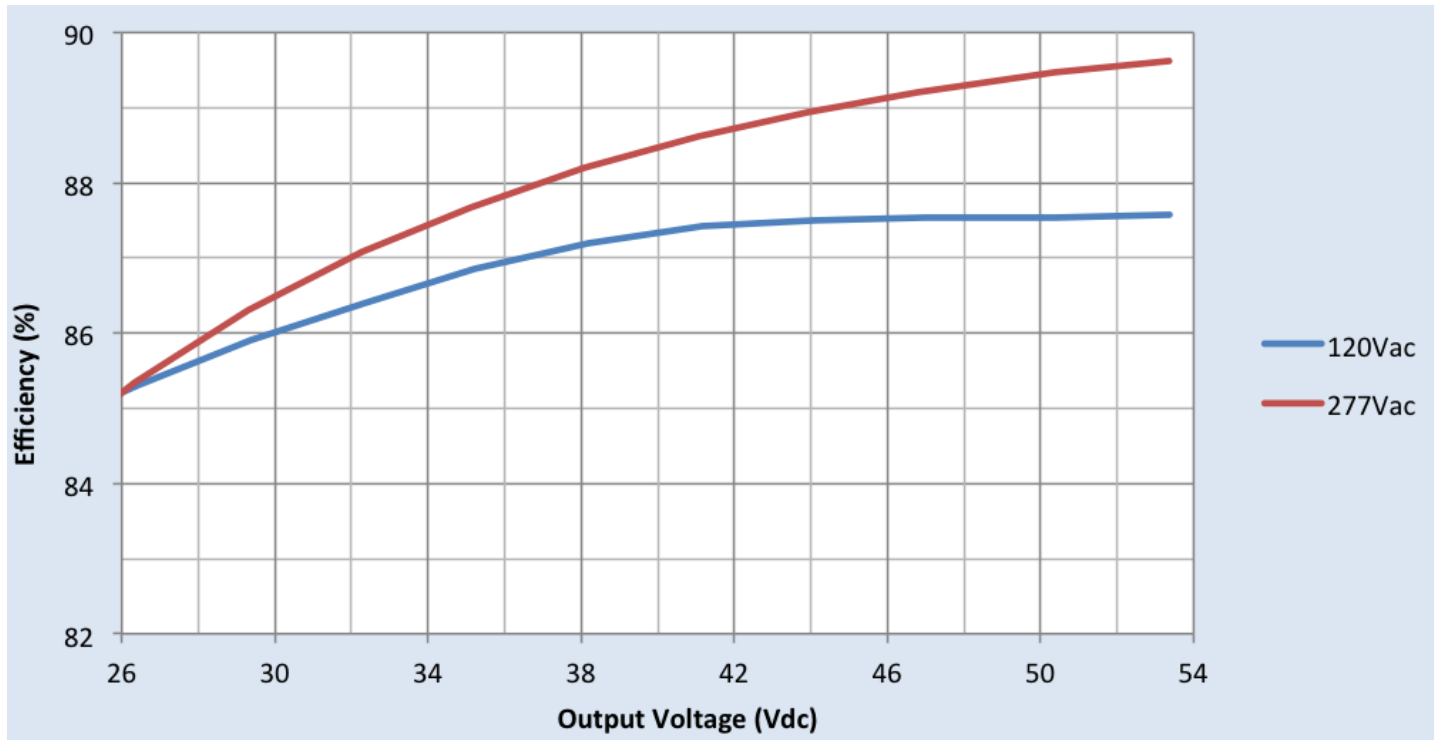


Xitanium XI080C070V054CNH1

80W 120-277V 0.7A 0-10V


Performance Characteristics

Based on measurements on a typical sample. The accuracy of the measurements is within the tolerance of the measurement instruments. The graphs are meant to be a guideline and not a specification.

Power Factor Vs. Output Power

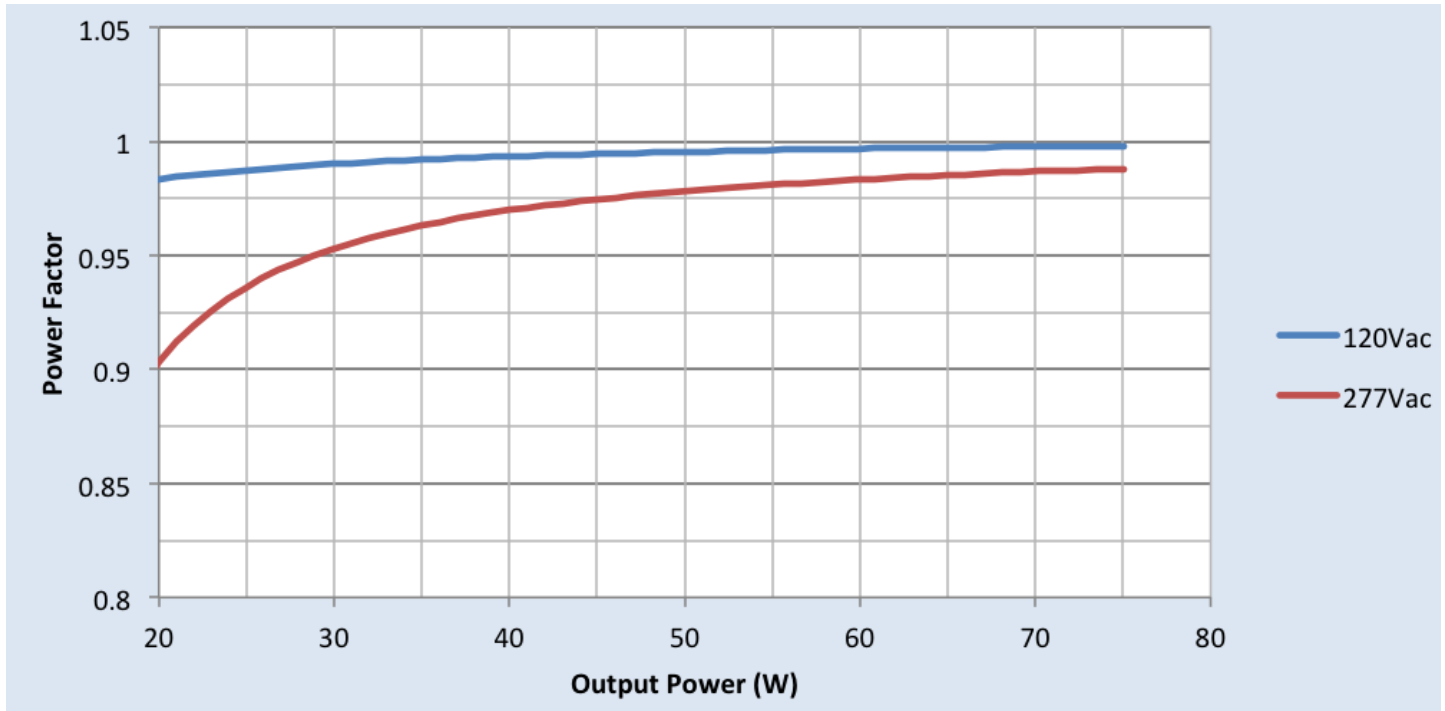


Total Harmonic Distortion (THD) Vs. Output Power

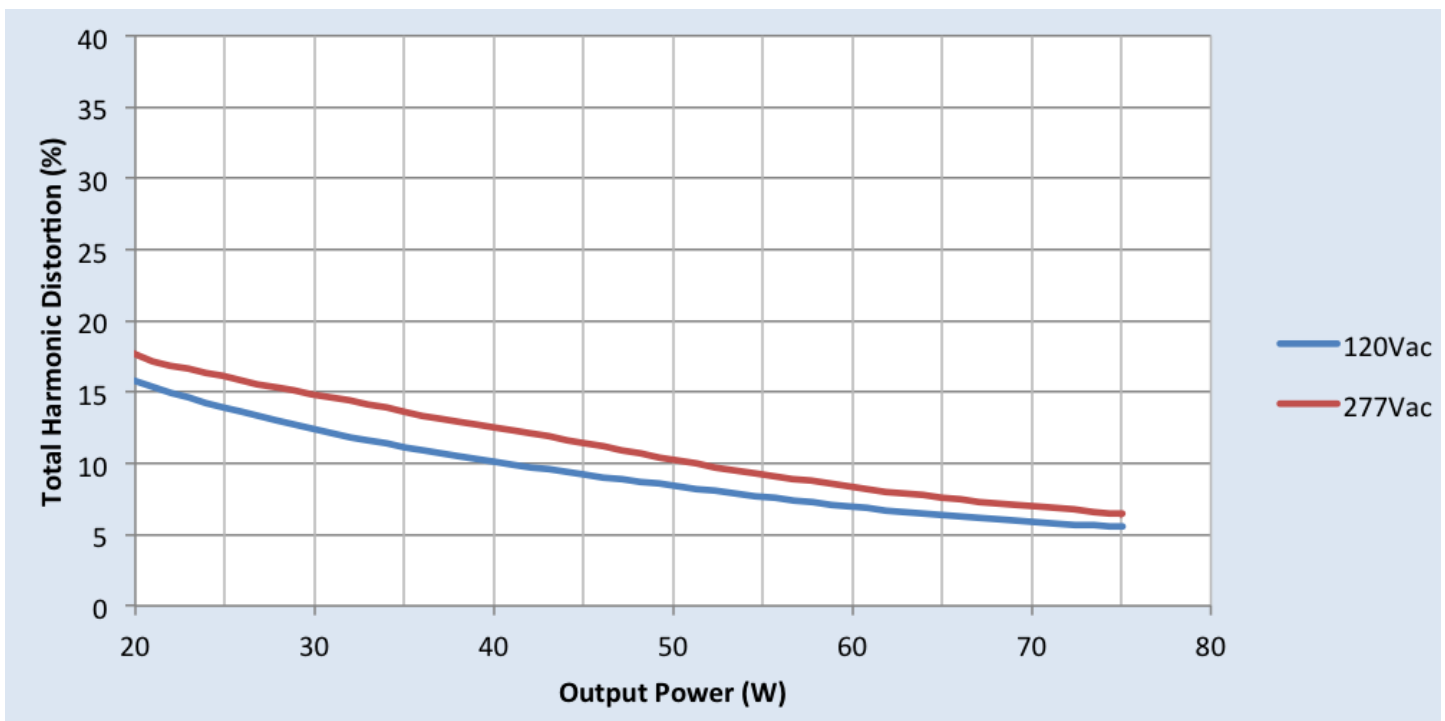

Xitanium XI080C070V054CNH1

80W 120-277V 0.7A 0-10V

Inrush Current Info

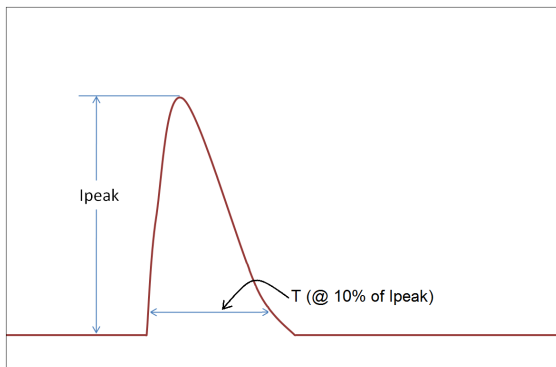

| Vin | Ipeak | T (@ 10% of Ipeak) |
|----------|-------|--------------------|
| 120 Vrms | 26A | 290μS |
| 277 Vrms | 69A | 255μS |

Inrush current is measured at peak of the corresponding line voltage. Source impedance per NEMA 410.

Lightning Surge Info

| ANSI Surge Type | Differential Mode (L-N) | Common Mode (L-G, N-G, L&N-G) |
|------------------------------------|-------------------------|-------------------------------|
| 1.2/50μs Combination Wave (w/t 2Ω) | 4kV | 4kV |

Isolation

| Isolation | Input | Output | 0-10V (Class 2) | Enclosure |
|-----------------|---------|---------|-----------------|-----------|
| Input | NA | 2xU+1kV | 2xU+1kV | 2xU+1kV |
| Output | 2xU+1kV | NA | 2xU+1kV | 500V |
| 0-10V (Class 2) | 2xU+1kV | 2xU+1kV | NA | 2xU+1kV |
| Enclosure | 2xU+1kV | 500V | 2xU+1kV | NA |

U = Max input voltage

UL Conditions of Acceptability

Please contact your representative for a copy of the latest UL Conditions of Acceptability (COA).

The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract.



© 2022 Signify Holding. All rights reserved. The information provided herein is subject to change, without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify.

Signify North America Corporation
400 Crossing Blvd, Suite 600
Bridgewater, NJ 08807
Telephone: 855-486-2216

Signify Canada Ltd.
281 Hillmount Road,
Markham, ON, Canada L6C 2S3
Telephone: 800-668-9008

All trademarks are owned by Signify Holding or their respective owners.