

by (s) ignify


Xitanium

LEDUNIA0350C12F



Electrical Specifications

Max. Input Power (W)	Output Volt. (V)	Output Current (A)	Operating Temp. Range (°F/°C)	Input Current at 120V (A)	Max. Input Power (W)	Inrush Current (Apk/µs)	Max. THD (%)	Min. Power Factor	Surge Protec- tion (KV)	Weight (Lbs)	Envir. Protec- tion Rating	Driver Type
4	2.8~12 Class 2 Output	0.35	14°~104°F (-10~40°C)	0.12	7	-	20	0.5	-	0.13/60	UL Dry & Damp	Constant Current

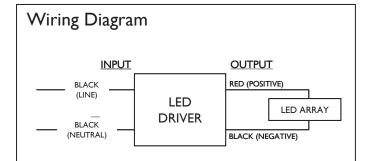

Input and Output use lead-wires. Lead-wires are 20AWG 80C/300V stranded copper


Standard Lead Length

	in.	cm.
Black	6	15
White		
Blue		
Red	6	15
Gray		
Violet		

Maximum Wiring Distance (at full load)

Wire Size	Distance		
(AWG)	(feet)		
26	16		
24	26		
22	43		
20	68		
18	108		
16	170		
14	275		

Revised 05/16/2012

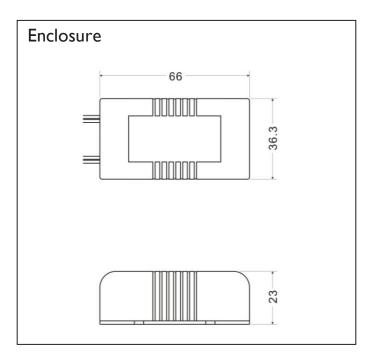

Warning

- Install in accordance with national and local electrical codes.
- The field-wiring leads or push-in terminals shall be fully enclosed.



UL Class 2 E215167

Xitanium LEDUNIA0350C12F

LEDUNIA0350C12F				
Brand Name	XITANIUM			
Driver Type	Electronic			
Input Voltage	120~230V			
Input Frequency	50/60 hZ			
RoHS	Yes			
Approbations	UL			
Status	Active			

Installation & Application Notes:

Section I – Physical Characteristics

- 1.1 LED Driver shall be installed inside an electrical enclosure.
- 1.2 Wiring inside electrical enclosure shall comply with 600V/105°C rating or higher.

Section II – Performance

- 2.1 LED Driver tolerates sustained open circuit and short circuit output conditions without damage.
- 2.2 LED Controller maximum allowable case temperature is 69°C.

Section III - UL Conditions of Acceptability (File E215167)

When installed in the end product, consideration shall be given to the following:

- 3.1 This component has been judged on the basis of the required spacing in the Standard for Class 2 Power Units, UL 1310, Par. 24.5 to Par. 24.9, UL840, Table 9.1 and the Canadian Standard for Power Supplies with Extra-Low-Voltage Class 2 outputs, Table 2 and Table 3.
- 3.2 This power supply was intended for use in indoor use equipment only.
- 3.3 This transformer employs Class 105(a) insulation.
- 3.4 These components shall be installed in compliance with the enclosure and mounting requirements of the ultimate application.
- 3.5 The input and output leads are minimum No. 20 AWG, rated 300V, 80°C. The suitability of input and output connections shall be determined in each end use application.
- 3.6 The strain relief, mold stress relief distortion and impact tests have not been investigated. The flammability of enclosure material under investigation is V-2. The suitability of the enclosure as ultimate enclosure shall be determined in the end-use application.
- 3.7 The maximum temperature measured on enclosure surface was 69°C during the Temperature test. The necessity of repeat Temperature Test shall be determined in each end-use application.
- 3.8 The necessity of repeated Leakage Current Test shall be determined in each end-use application.

Revision History:

Rev No.	Date	Description	Approval	Remarks
1.1	02/02/2012	02/2012 * Update Standard Lead Length to		
		(6in=15cm)		
1.2	01/12/2012	*Add Envir. Protection Rating	N.T.	
1.3	03/02/2012	*Modify Part #(Remove Dashes)	N.T.	
1.4	05/16/2012	*Add Approbations: UL	N.T.	

The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract.



© 2019 Signify Holding. All rights reserved. This document contains information relating to the product portfolio of Signify which information may be subject to change. No representation or warranty as to the accuracy or completeness of the information included herein is given and any liability for any action in reliance thereon is disclaimed. All trademarks are owned by Signify Holding or their respective owners.

Signify North America Corporation 200 Franklin Square Drive, Somerset, NJ 08873 Telephone 855-486-2216

Signify Canada Ltd. 281 Hillmount Road, Markham, ON, Canada L6C 2S3 Telephone 800-668-9008